


WAGENER LEON - MULTI FUEL

Installation Clearances as tested to AS/NZ Standard 2918:2001

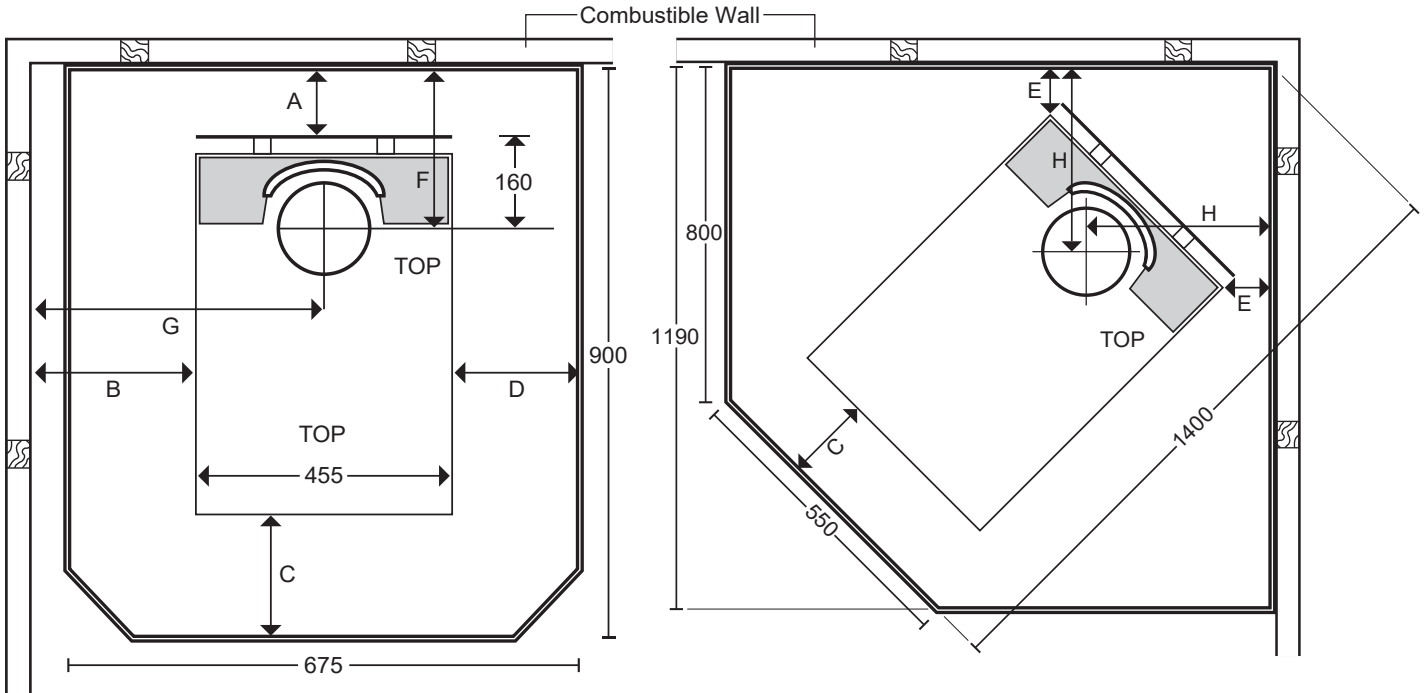

Requires Ash Hearth Floor Protector Only

Wetback pipe height: 540mm & 625mm

Minimum clearance to Combustible Surfaces	A	B	C	D	E	F	G	H
With a capped single stainless steel flue shield to unprotected wall	90	410	300	110	210	250	638	440
As above 12mm Eterpan LD board spaced 25mm off wall	37	119	Floor protection must extend under the stove and forward 200mm extending either side of the door opening		61	187	347	311
As above with sheet metal any type 0.5mm or thic ker spaced 25mm off the wall.	27	123			63	187	351	313
Sheet metal as above 2 sheets spaced 12mmx12mm	25	82			42	178	310	292

Other screening materials are available and clearance factors can be calculated to the AS/NZS 2918:2001. Please ask your retailer or contact Wagener Stoves if you need further advice.

