


# WAGENER SPARKY - MULTI

## Installation Clearances

## AS/NZ Standard 2918:2001

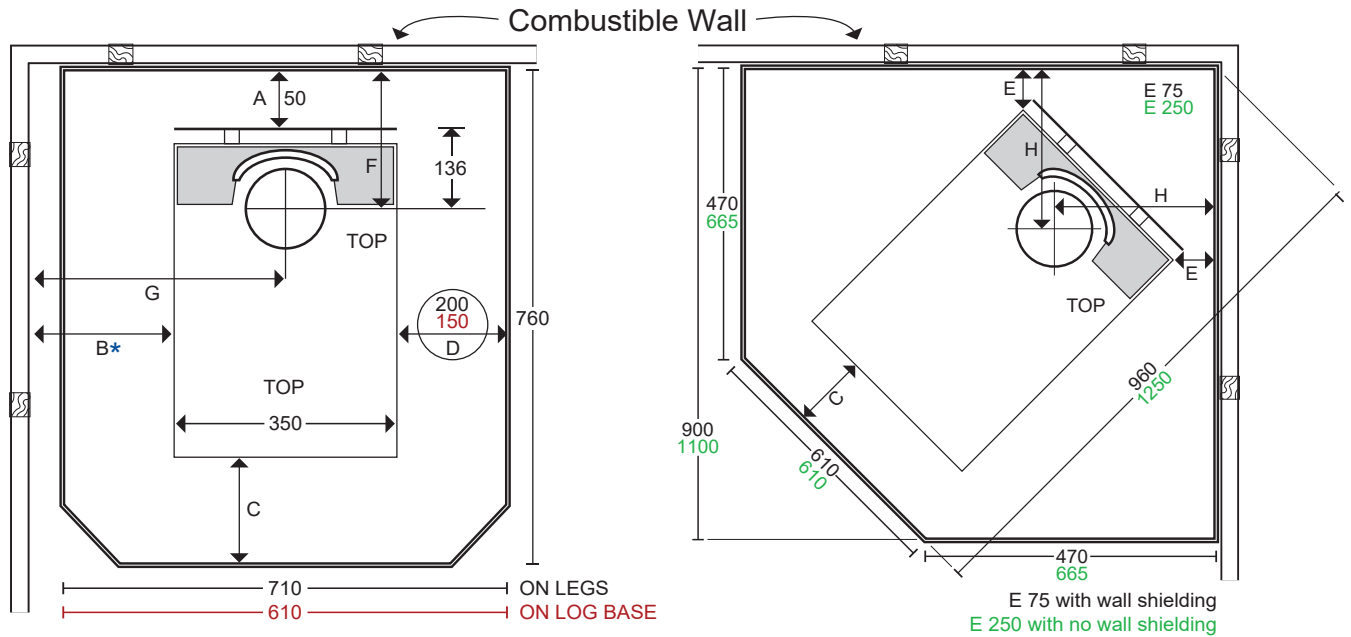

- Optional log box base requires ash hearth floor protector only\*
- Standard leg model requires insulated hearth floor protector\*\* (eg One sheet 12mm promina board with treadle plate on top surface)

### Wetback Pipe (Door Hinge Side)

- On legs 205mm & 285mm
- On base 495mm & 575mm
- 50mm side to centre of pipe

Minimum clearance to Combustible Surfaces (mm)	A	B*	C	D	E	F	G	H
With stainless steel flue shield to unprotected wall	50	550 350	300	150* 200**	250	186	725 525	450
As above with sheet metal any type 0.5mm or thicker spaced 25mm off the wall.	26	165 105	Floor protection must extend under the stove and forward 300mm. *Log base model 150mm to sides. **Leg model 200mm to sides.		75	162	340 280	275
Sheet metal as above 2 sheets spaced 12mmx12mm	26	110 70			50	162	285 245	250

\*NB side clearance reduced with extended side panels fitted

Other screening materials are available and clearance factors can be calculated to the AS/NZS 2918:2001.

